

DENSIFIER

Polystyrene Densification System

Loose EPS Foam
truckload weights of
2,000 lbs.*

Baled EPS Foam
truckload weights of
6,000 lbs.*

Densified EPS Foam truckload weights of 40,000 lbs.*

Eliminates pentane gas dangers

Reduced storage requirements


1,100 - 1,300 lbs. per hour

Reduced hauling/handling costs

Superior performance

Sophisticated PLC controls

Minimal maintenance

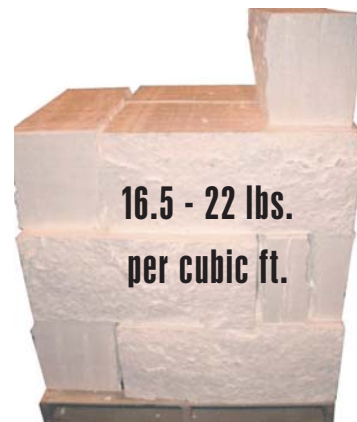

16.5 - 22 lbs.
per cubic ft.

* Truckload weights listed are approximate

Product Testing Available



Call Today

1-800-253-0532 Toll Free US

1-269-793-7183 Phone

Ask for your Bright Technologies Dealer

Model D120

Also available in Models D10 and D30 for lighter volume demands

Bright Technologies,
Specialty Equipment div. of Sebright Products, Inc.
127 N Water St.
Hopkins, Michigan 49328
800-253-0532 Toll Free US
269-793-7183 Phone
269-793-4022 Fax

Working together to provide
complete recycling and
waste processing solutions



Sebright




Stationary Compactors
Self-contained Compactors
Precrushers
Hydraulic Cart Dumpers, Custom Carts and Containers

Bright

Belt Filter Presses
High Density Extruders
Xtractors
EPS Foam Densifiers

For more information, please visit our websites at
www.sebrightproducts.com and
www.brightbeltpress.com

The Densification Specialists

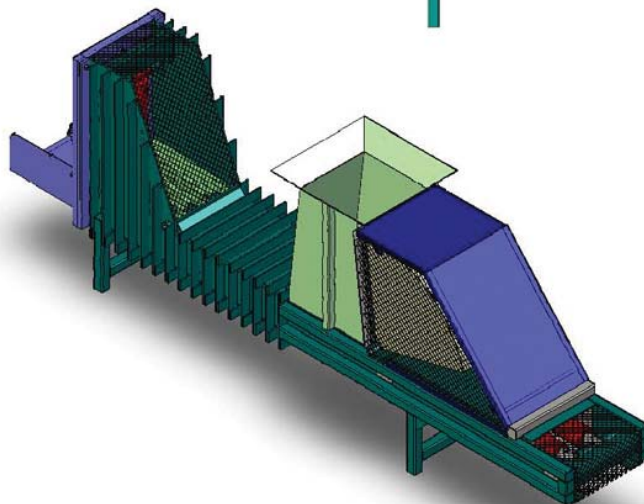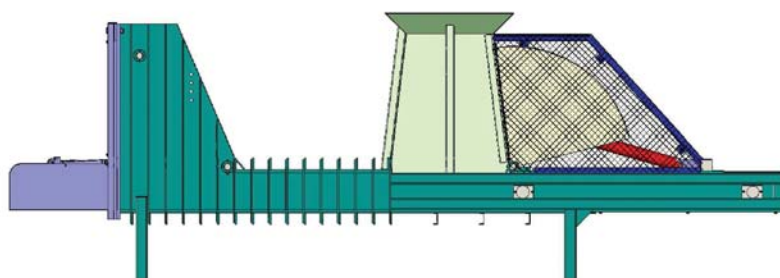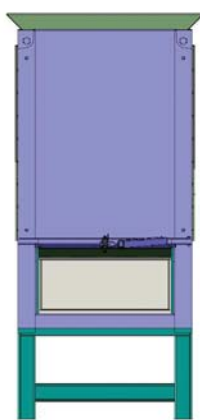

Chamber Volume	Motor	Cylinders	Ram Force	Total Force
9.02 ft ³ or .334 cu yards	30 HP	(2) 7" Diameter	495 PSI	192,000 lbs.
Feed Capacity	Volume Compaction Ratio	Output Density	Machine Weight	Power Unit Weight
1,100 - 1,300 lbs./hr	Up to 50:1	16 - 22 lbs./ft ³	10,000 lbs.	1,890 lbs.

Available options include:

- elevation stands
- blower systems
- bag house assemblies
- discharge snout extensions
- customized EPS foam pre-breakers
- automated block shears

Due to product improvements, the manufacturer reserves the right to alter or amend, without notice, any of these specifications and/or dimensions.

All machines and accessories are primer coated and finish painted. Standard color chart available upon request.

© Sebright Products, Inc. 2007

