



Horizontal auto-tie baler TYPE AVOS 1211

Maximum performance –
minimum space
required!

The horizontal baler type AVOS 1211 allows for high impact in the smallest spaces.

The very compact design of the baler allows easy positioning in working environments with minimal space. The machine also combines modern technology with a very robust design. Thus, you benefit from a long lifetime with high throughput and performance potential. The AVOS 1211 leads the pack in simple and safe handling - with fully automated operation and the proven 4-fold vertical binding.

Optional high torque, slow speed shredder available, this technology will accept boxes up to 7' wide!

Sebright Products, Inc.

Hopkins, Michigan, 49328, US

Phone +1-269-793-7183 . Fax +1-269-793-4022
seweb@sebrightproducts.com . www.sebrightproducts.com



Horizontal baler TYPE AVOS 1211-22/60

Horizontal auto-tie baler TYPE AVOS 1211

Technical Data

Options

You specify the details – for an optimal setup:


- › 880 lb wire coil holders
- › Feeding conveyor for continuous and constant feeding
- › Size reducing shredder to allow for large box sizes in small opening
- › Hook base frame

Your benefits:

- › **Robust:** Stable, torsion-resistant design
- › **Flexible:** Individual equipment options
- › **Safe:** Vertical 4-fold binding
- › **Space saving:** Compact design
- › **Reliable:** Proven technology with more than 40 years of experience

Industry leading warranty:

- › 3 years parts & labor included
- › Years 4 & 5 available for purchase

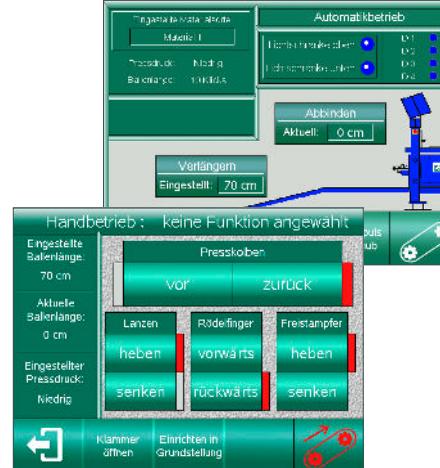

Touch screen display with multiple functions



AVOS 1211 with hook base frame

Overview of technology

AVOS 1211-22/60

Machine length	228 inches (19')
Machine width	71 inches (5'11")
Machine height	118 inches (9'10")
Feed opening	47 inches x 43 inches
Dead weight approx.	18,700 lbs
Bale dimensions (W x H)	43 inches x 28 inches
Bale length	adjustable
Bale weight* - up-to	1,100 lbs
Binding system	4-fold, vertically
Channel adjustment**	semi-automatically
Cycle time (empty)	20 sec
Throughput @ 299 lbs/cubic yd, up to	8.6 t/h
Ram face psi	113 psi
Press force	132,000 lbs force
Motor size	30 hp
Cylinder size:	5" bore, 4" rod

* depending on bale length and material,

** top channel plate fully automatic, side channel plates manually

Adjustable bale length; binding: 4-fold vertical;
Electrical connection: 460 volt, 3 phase, 50 Hz;
Fuse protection on site: 60A

While Sebright Products, Inc. strives to make the information provided on processing of your waste or recycling stream, as timely and accurate as possible, the company makes no claims, promises, or guarantees about the accuracy, completeness, or adequacy of any of the provided information, and expressly disclaims liability for errors and omissions in the content of the information, or analysis provided to your company. It is solely the responsibility of each recipient of the information Sebright Products, Inc. has provided to satisfy itself as to the accuracy of the information provided by Sebright Products, Inc. and as to the efficacy of the product(s) for the use(s) intended.