



# Horizontal baler TYPE AVOS 88

## Compact and economic solution for highest efficiency

With the horizontal baler type AVOS 88 you achieve **maximum continuity**. Whether paper, cardboard or foil - this press delivers convincing performance every day with high efficiency and cost-effectiveness. Highly compacted, fully-automatic bound bales enable space-saving storage and cost-optimized transport. Long lifetime, low energy consumption and easy handling - this machine leaves nothing to be desired.



**Sebright Products, Inc.**  
Hopkins, Michigan, 49328, US

Phone +1-269-793-7183 . Fax +1-269-793-4022  
[seweb@sebrightproducts.com](mailto:seweb@sebrightproducts.com) . [www.sebrightproducts.com](http://www.sebrightproducts.com)

# Horizontal baler TYPE AVOS 88

## Technical Data

## Options


You specify the details –

for an optimal setup:

- › Manual feeding hopper
- › Bale chute
- › Touch screen display

Your benefits:

- › **Savings:** Low power consumption
- › **Flexible:** Individual equipment options
- › **Space saving:** Suitable for applications with limited space
- › **Reliable:** Proven technology with more than 40 years of experience

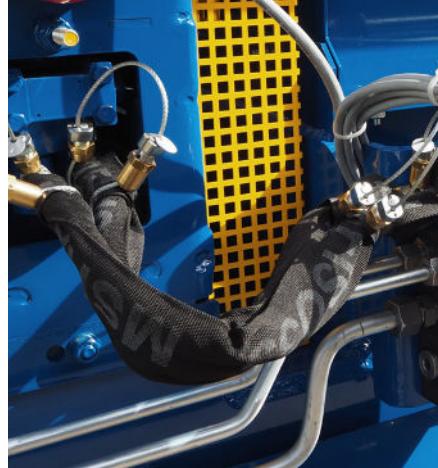

Hydraulic hose with safety trap and burst protection



Version with sliding belt conveyor

### Overview of technology

AVOS 88-7.5/30

AVOS 88-11/30

Machine length	157.5 inches	157.5 inches
Machine width	66 inches	66 inches
Machine height	98 inches	98 inches
Feeding hopper cross section	31.5" x 31.5"	31.5" x 31.5"
Dead weight approx.	7,936 lbs.	8,157 lbs.
Bale dimensions (W x H)	31.5" x 21.5"	31.5" x 21.5"
Bale weight* up to	550 lbs.	550 lbs.
Channel adjustment	manual	manual

Tank volume

Cycle time (empty)	22 seconds	14 seconds
Throughput @ 288 lbs/cubic yd, up to	5.2t/h	8.2t/h
Ram face psi	114 psi	114 psi
<b>Motor size</b>	<b>10 HP</b>	<b>15 HP</b>
<b>Press force</b>	<b>66,000 lbs.</b>	<b>66,000 lbs.</b>
<b>Cylinder size</b>	<b>4" bore, 3" rod (externally mounted)</b>	<b>4" bore, 3" rod (externally mounted)</b>

\*depending on bale length and material

### Valid for all machines:

Adjustable bale length: binding: 4-fold vertical;  
Electrical connection: 460 volt, 3 phase, 60hz;  
Fuse protection on site: 60A